

1 / 6

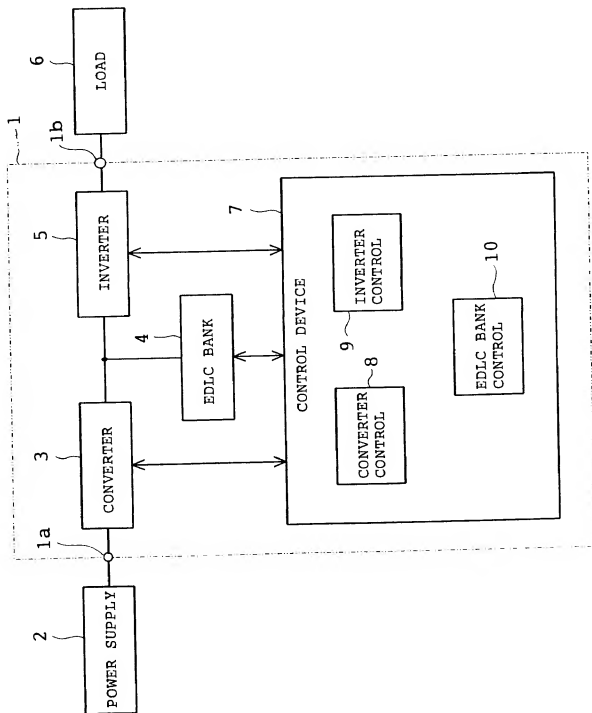


FIG. 1

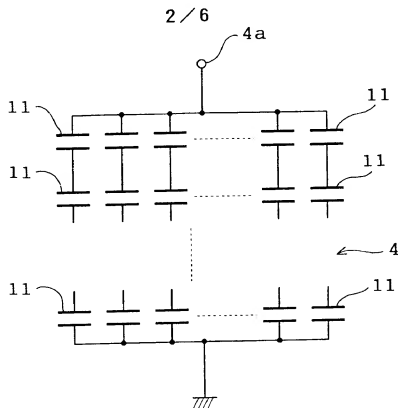


FIG. 2




FIG. 3

3 / 6

PERFORMANCE	EDLC BANK	LEAD-ACID STORAGE BATTERY	ALUMINUM SOLID ELECTROLYTIC CAPACITOR
ENERGY DENSITY	0.2~10Wh/kg	10~40Wh/kg	< 0.1Wh/kg
OUTPUT DENSITY	100W/kg~5000W/kg	50W/kg~130W/kg	10W/kg~100W/kg
CHARGING TIME	0.1~100 MIN.	1~10 HOURS	< 1 MSEC.
DISCHARGING TIME	0.1~100 MIN.	0.3~3 HOURS	< 1 MSEC.
CHARGING EFFICIENCY	>95%	70%~85%	>95%
INTERNAL RESISTANCE	SEVERAL mΩ	SEVERAL TENS mΩ	E S R ≒ 10~100 mΩ
CYCLE LIFE	>10000	200~1000	>100000

FIG. 4

4 / 6

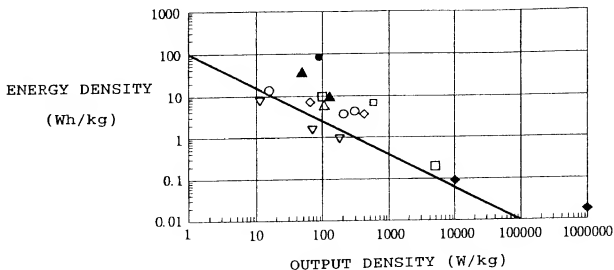


FIG. 5

5 / 6

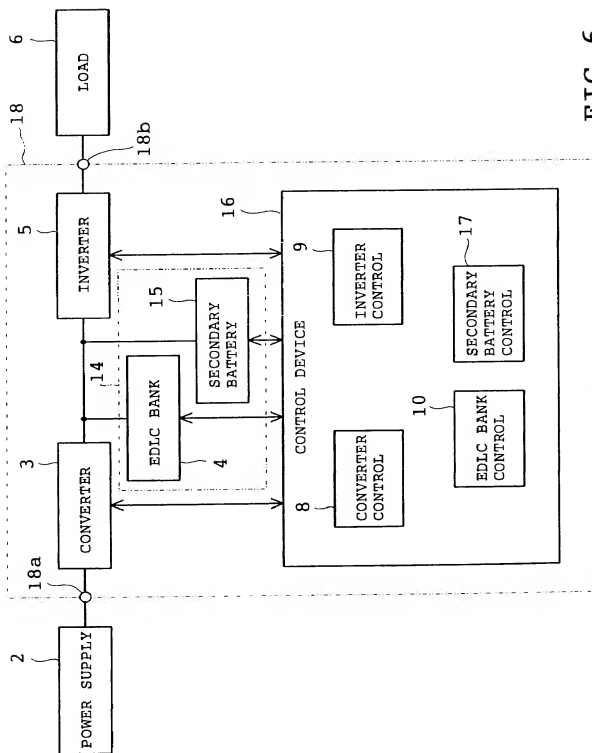


FIG.6

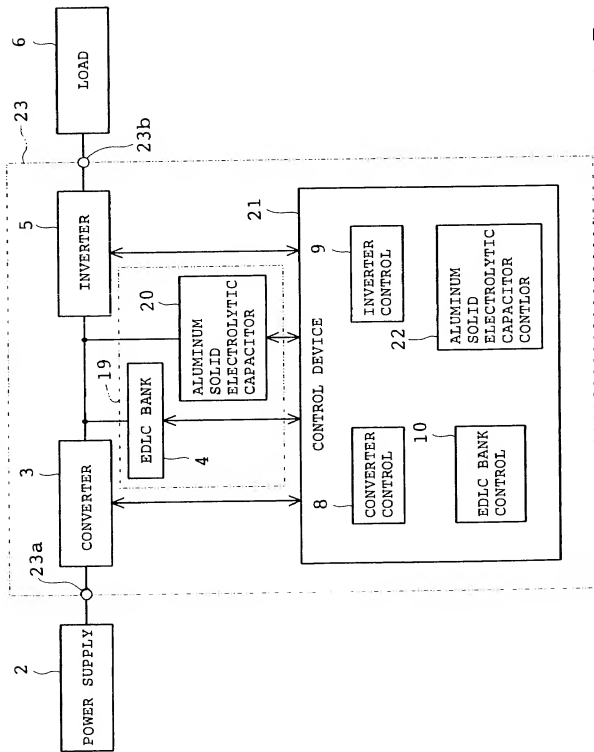


FIG. 7